

www.thunghing.com.my enquiries@thunghing.com

Typical Gable End of TH® Strip Ceiling-G Type 50 x 50 Adjustment for TH® Strip Facades Typical Detail at Bottom

The information and illustration contained herein are for guidance only. Care has been taken to ensure all data and information herein is factual and numerical values are accurate at the time of publication. However, any or all technic specification, information and dimensions are nominal and provisional; they are subjected to change and variations in accordance with market conditions at the date of factual supply. No representation is made or to be implied as to the data and information herein; THI Hardware Trading Sdn. Bhd. and its subsidiary and associate companies shall not be responsible for any errors in or misrepresentation of the information contained in this brochure or its use. THI Hardware Trading Sdn. Bhd. and its subsidiary and associate companies reserve the right to alter any or all specifications as deemed fit and necessary without prior notice.

Copyright © 2016 THUNG HING GROUP.

THUNG HING INDUSTRIAL TRADING SDN BHD (264902-P)

Please Like our Facebook



THUNG HING GROUP

HEAD OFFICE

SELANGOR DARUL EHSAN:
Lot P. T. 1353, Jalan Mohd Taib,
Kaw. Industrian Sg. Choh, 48000 Rawang,
Selangor Darul Ehsan, Malaysia
Tel: +603-6099 9988 / 9999
Fax: +603-6099 9922 / 9933

NORTHERN FACTORY

KEDAH DARUL AMAN:
Lot 73-A, Jalan Sepuluh,
Kaw. Perindustrian Bakar Arang,
08000 Sungai Petani,
Kedah Darul Aman, Malaysia
Tel: +604-421 4814 / 4885
H/P: 017 - 654 1288
Fax: +604-421 5591 / 4519

EAST COAST FACTORY

KELANTAN DARUL NAIM:
Lot 1493, Kaw. Perindustrian Pengkalan Chepa II,
Seksyen 44, Mukim Panchor, Daerah Kemumin,
16100 Kota Bharu, Kelantan Darul Naim, Malaysia
Tel: +609-774 1127 / 1128
Fax: +609-609-774 1130 / 1131

SOUTHERN FACTORY

JOHOR DARULTAKZIM:
Lot 4452, Pt. Kampung Abdul Rahman,
82200 Benut, Pontian, Johor Darul Takzim,
Malaysia
Tel: +607-690 9926 / 9929
H/P: 017 - 464 1218
Fax: +607-690 9928



TH® STRIP CEILING - G **PROFILE**

ADVANTAGES


- Tough and extremely durable
- Protect from discolouration for longer duration use
- Does not contort under intense heat
- Hygienically smooth surface for easy maintenance
- Noise insulated multi chamber frames
- Energy saving & environmentally friendly

PROFILE

- Coating Type
- Metalic Coating Steel
- Base Metal Thickness (BMT)
- Total Coated Thickness (TCT)
- Effective Width
- Tolerance
- Aluminium Thickness


- : Aluminum-Zinc Coating
- COOLZAL® steel (AZ90) / ELEMENTS™ steel (AZ100)
- : 0.25mm 0.30mm
- : 0.30mm 0.35mm
- 350mm
- : Length ±0,-2.3mm / Width ±2mm / Thickness ±0.02mm
- : 0.55mm to 0.70mm

TH® STRIP CEILING - G PROFILE : TYPE 1 - Wave



TH® STRIP CEILING - G PROFILE : INSTALLATION




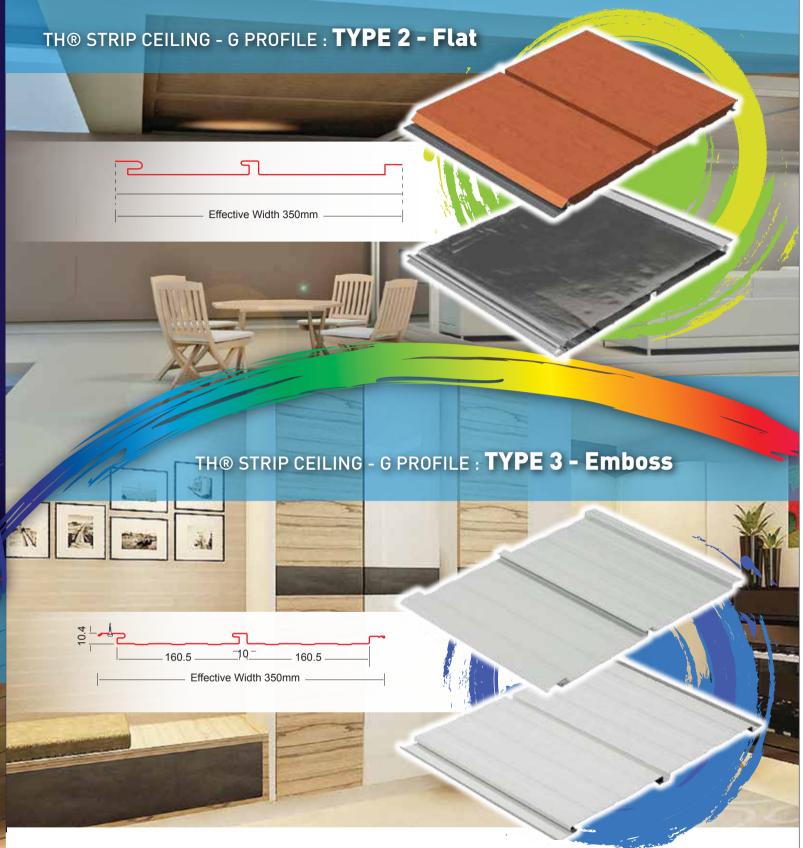



TH® STRIP CEILING - G PROFILE : ACCESSORIES



M BAR 1 * Standard Length 12"







12"

* Standard Length 12"

Important Note: Flat metal surfaces will display w referred to as oil canning. This is caused by steel mill tolerances and is a characteristic, not a defect, of panels manufactured from light gauge metal